


Residential Dumbwaiter

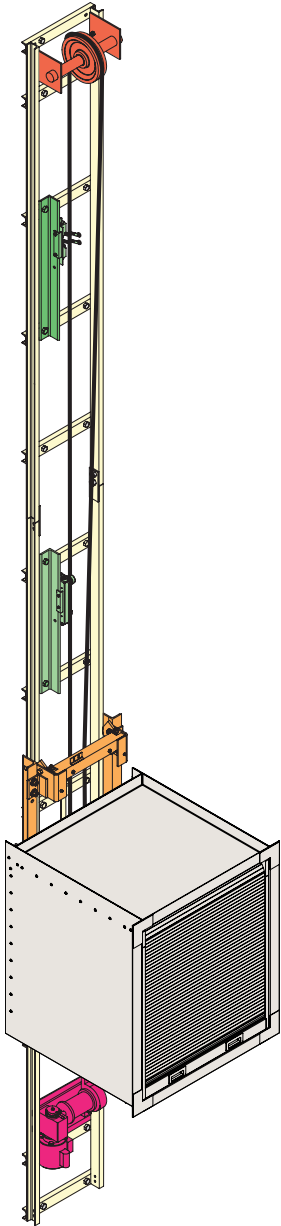

Capacity - 200 lbs.

Travel - Up to 50 ft.

Stops - Up to 6 stops

Nominal Speed - 50 feet per minute

Overhead - 1'6" minimum,
2' recommended above top of car
(additional overhead required for car gates
or overhead machine configurations)

Loading Height - 36" minimum when
machine is "rail mounted" below car
(overhead or remote machine location
and/or pit, required for loading heights
below 36")

Guide Rails - Heavy gauge steel channel

Electric Supply - 230 volts, 10 amp,
single phase

Powerhead - Single speed winding drum
with 1HP motor

Brake - Electrically released, spring applied

Controls - Momentary contact call/send
push buttons at each landing

Safeties - Twin instantaneous broken
cable, applied by a retained compression
spring


Cable - 3/16" diameter steel cable

Hoistway Door Interlocks - Required at
each landing


Emergency Lowering - Manual hand
crank

Car - Powdercoated steel (standard)
Stainless Steel (optional)

Car Gate Options



Roll Top (standard)



Bi-Parting (optional)

Additional Options - are available, for
details contact your local dealer

Products and illustrations shown may not be standard. Specifications describe equipment, which is either standard or optional. Stated ratings are based on standard equipment. Specifications and design are subject to change without notice.